

G50 Specifications

Port Dimensions

193 GPM Max.

Intake & discharge connection:

Aluminum (ADC-12)	2" Female NPT
Air inlet (incl. ball valve):	3/4" Female NPT
Air exhaust (incl. silencer):	1" Female NPT

Maximum Liquid Temperature*

Diaphragm Material	Temperature
Buna N	180°F (82°C)
Santoprene® (TPO)	180°F (82°C)
PTFE	212°F (100°C)
Hytrel® (TPEE)	248°F (120°C)

*The maximum liquid temperature is determined by the elastomer (diaphragm material).

Air Supply Pressure:


Rubber: 20 – 125 PSI (1.4 – 8.7 kgf/cm²)

PTFE: 20 – 100 PSI (1.4 – 7 kgf/cm²)

Maximum Size Solid: 5/16 (8mm)

Air Motor: Aluminum

Valve Type: Ball

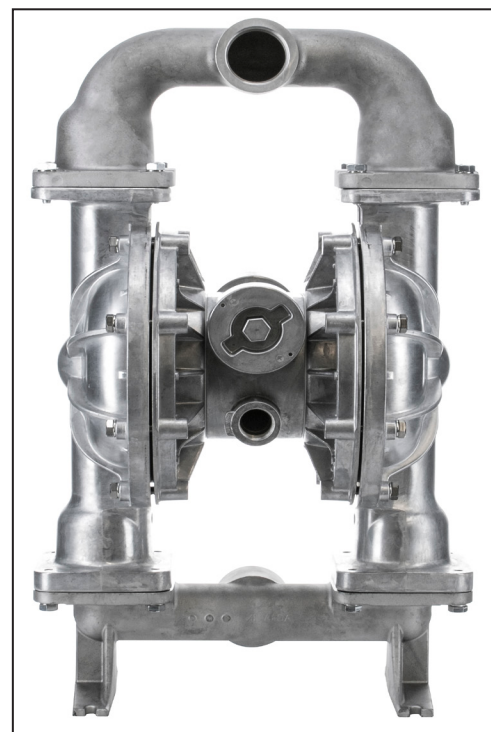


Aluminum

Dimensions: 16.4"L x 21.6"W x 26.5"H

Net Wt.: 66.1 lbs. (30 kg)

Shipping Wt.: 76 lbs.

Dimensions

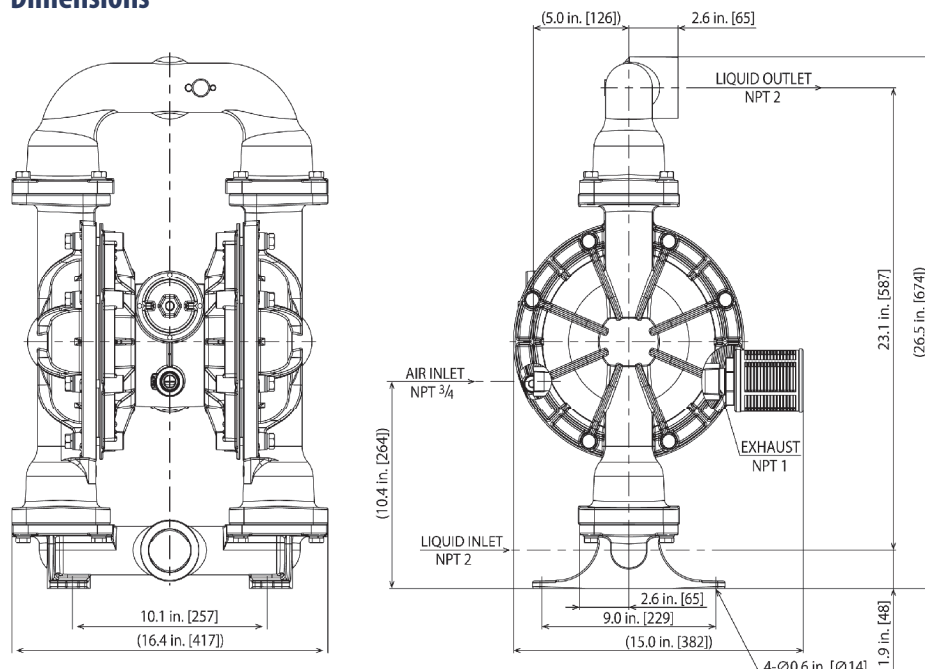

Model Number Nomenclature


G50 A x 1 1

Series:
Global Pumps


Body Material:
A = Aluminum

Diaphragm Material:
H = Hytrel® (TPEE)
N = Buna N (NBR)
S = Santoprene® (TPO)
T = PTFE

G50 Metal - Rubber Performance Curves

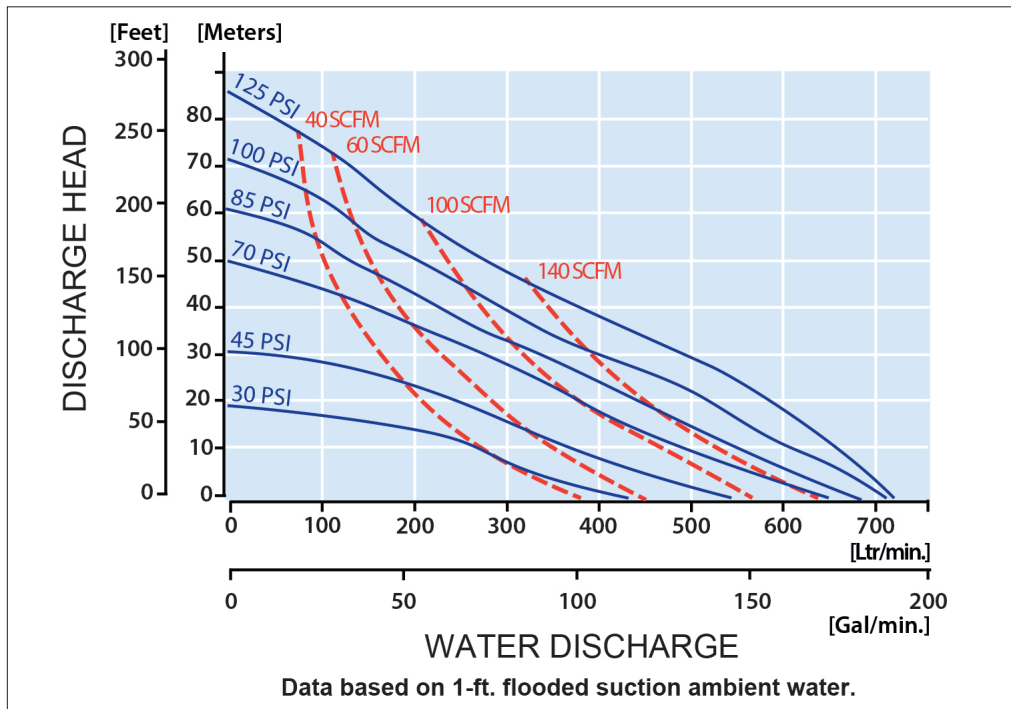

G50 Metal - PTFE Performance Curves

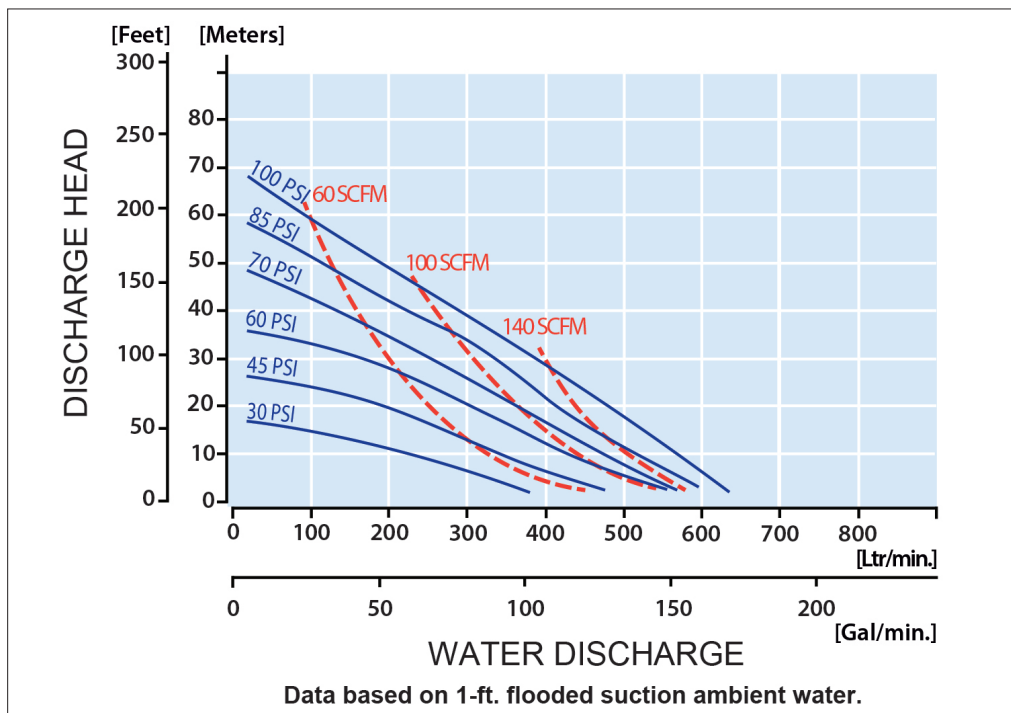

Hytrel® is a registered trademark of E.I. du Pont de Nemours and Company.
 Santoprene® is a registered trademark of Advanced Elastomer Systems.
 Yamada® is a registered trademark of Yamada America, Inc.
 Global Series® is a registered trademark of Yamada America, Inc.
 The Proof's in the Pump® is a registered trademark of Yamada America, Inc.
 The Proof is in the Pump® is a registered trademark of Yamada America, Inc.
 Engineered to Perform. Designed to Outlast.® is a registered trademark of Yamada America, Inc.
 Due to Yamada's continued commitment to product improvement, specifications may change without notice.